INSTALLATION INSTRUCTION

COMPLETE COUNTER TOP WOK **MODEL C-W1**

This appliance should be installed by authorised persons only and must installed in accordance with the manufacturers instructions and A.G 601, 1995 Section 5-12-4 catering equipment with the reference to clauses 5-12-4-5.

(1) Location

The appliance must be installed in a well ventilated room, and the installation must comply with the local health department regulations and local by laws and gas fitting regulations and legislation.

(2) This appliance must not be installed on combustible surfaces, all surrounding areas must be non combustible refer to A.G 601 referring to standards A-S1530.1 ~ minimum thickness of materials be no less than 6mm (Refer addenda attached).

(3) Check the data plate for the correct operating gas pressures and set to the required test point pressure. Refer to tables on specification and data plate.

(4) The gas inlet to the appliance is located on the left hand side of the appliance behind the control panel at the rear. Connection to the unit is 20mm / 3/4 B.S.P a regulator is supplied with the unit. Note the installer must provide an isolating gas cock to enable the appliance regulator to be serviced as well as the appliance. The installer must calculate the pipe size required to maintain adequate gas pressure to the appliance. (Test for gas tightness of fitting lines before leaving installation.

(5) Before leaving the installation light up the appliance and demonstrate to the operator how to use the appliance safely.

(6) Should the appliance fail to operate contact the local distributor or manufacturer.

OPERATING INSTRUCTION

COMPLETE COUNTER TOP WOK **MODEL CW-1**

(1) LIGHTING UP OF APPLIANCE

To light pilot turn control knob to marked pilot on position anti-clockwise, and push control knob down then place lighter taper to pilot head, for approx 15-20 seconds on new installations allow for air to be released from pilot 2-3 minutes.

(2) When pilot light is established continue to turn gas control to high gas position and adjust flame as required, the position indication off. The flame settings are marked on the gas valve knob.

(3) To turn gas including pilot to off when not in use turn control knob clockwise to "off " position.

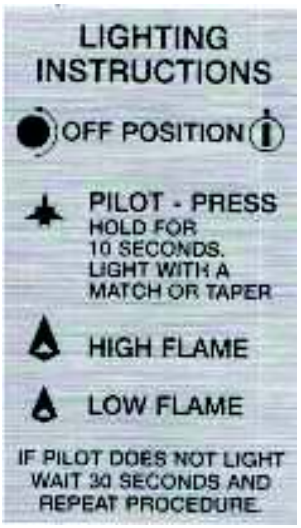

SERVICE INSTRUCTIONS

COMPLETE COUNTER TOP WOK **MODEL CW-1**

(1) To clean turbo gas injectors simply unscrew from cast ring and use fine needle so as not to increase size of injector.

(2) To clean pilot or to replace thermocouple undo complete assembly from pilot bracket by removing connection to pilot line and thermocouple, refer to instruction drawing attached.

(3) Do not over tighten thermocouple after replacement as damage to the connection within the control could occur.

(4) Should the pilot require adjustment this is done by undoing the cap at the base of the pilot and inserting a small screw driver into the micrometer adjuster i.e. the increase decrease the flame as required for safe ignition.

AUSTCROWN PTY LTD
10 Fink Street, PRESTON VIC 3072
Ph.: 03 9256 9119 email: info@auscrown.com.au
Website: www.auscrown.com.au