Installation instruction

Model：**9860-B**
Glass Rinser

When you open the product package , firstly, please check carefully the accessories according to the following Part Number Guide. If you find any parts missing, please contact your local dealer or our factory as soon as possible.

Attention: Be sure to read all the contents of this installation manual before installation

Part Number Guide		
		QUANTITY
1	Sink	1
2	Gasket	1
3	Base	1

*All diagrams shown here are for reference only, specifications are subject to the physical products.

Technical data：
Product Name：
Glass rinser
Media：Water
Safety pressure：0.4Mpa
Hyper pressure scale：±10%
Working temperature：85 °C
Execution standard：
Food grade CE certification
WRAS British Drinking Water Safety Certification
ACS French Health Certification
NSF American Certification
CQC China Product Certification
Install connection：G1/2”

Installation precautions：
A.Refer to AS/NZS 3500.1 for installation ,including the installation of any non-integral back flow prevention device.
B.This faucet has been professionally tested and adjusted, please do not disassemble and assemble by yourself.
C. Please clean the inlet pipe before installation, to prevent the faucet from becoming clogged, affecting normal water flow.
D. The size of deck mounting shall be subject to the A of the above diagram.
E. Please check the sealing condition of each joint after the installation, Important to make sure there is no leakage.

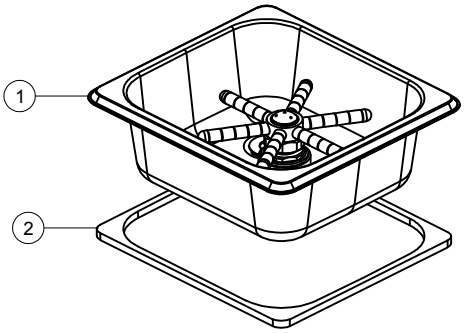

1. Put the rubber gasket under the sink groove

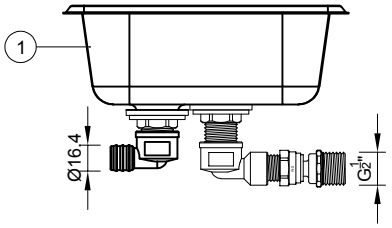

2. Connect the check valve

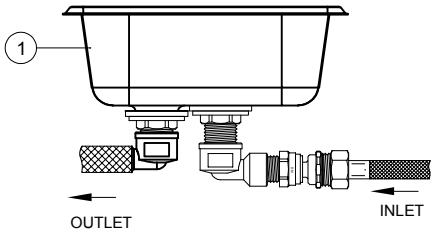

3. Connect the inlet and outlet flexible hoses.(The hoses must be supplied separately.)

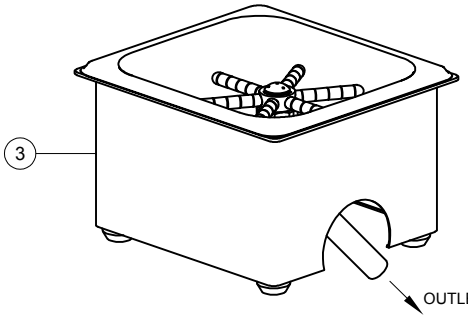

4. Put the sink on the base, The unit can be used after the water connection is completed

ZHEJIANG SUNMIXER SANITARY WARE CO.,LTD.
Add:Science & technology Industrial Zone,
Chumen,Yuhuan,Zhejiang,China
Http://www.pre-rinse.com E-mail:info@pre-rinse.com
Tel:+86-576-87121420 +86-576-81731911 Fax:+86-576-87121319